






AGENDA


FLOOR PLANS

ESTIMATE

SUMMARY



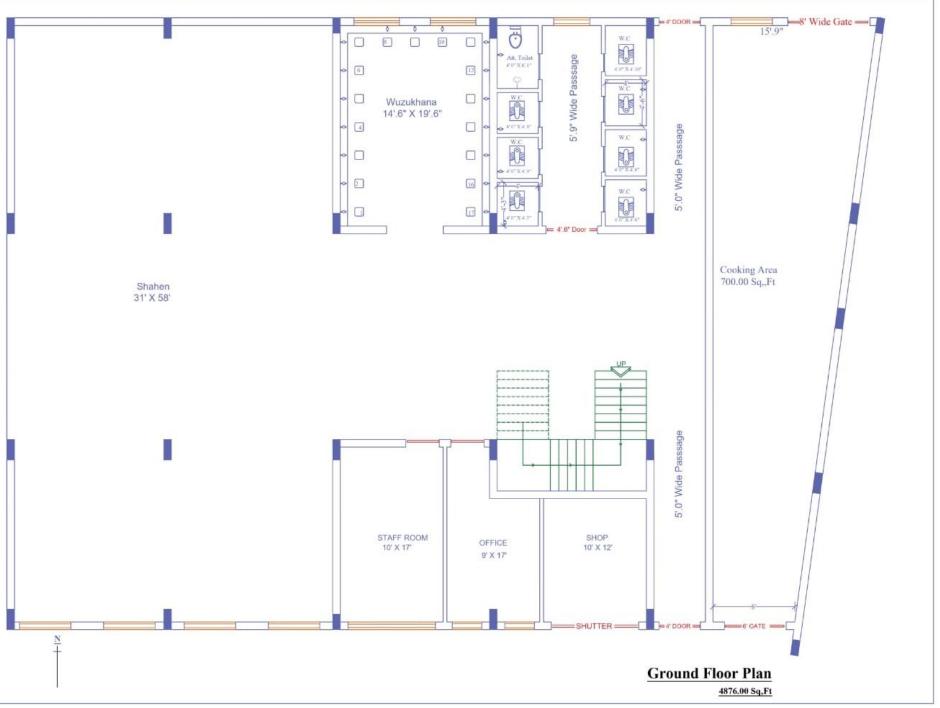

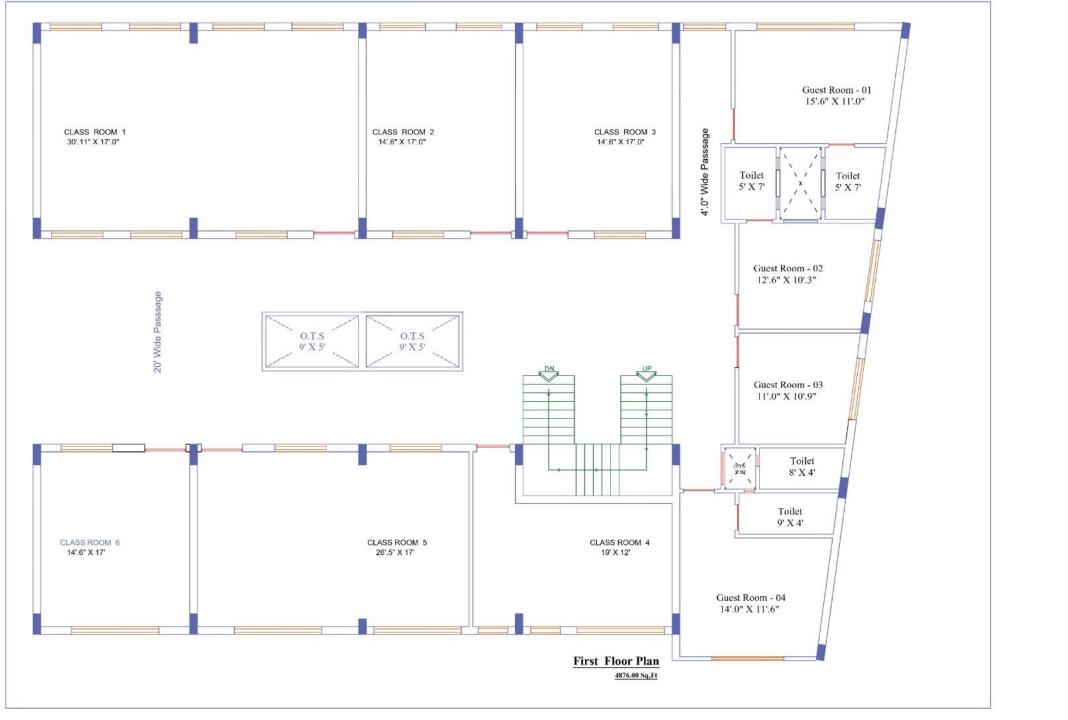

Khalid Rangrej.

D.C, D.C.E, B,Arch Opp- Petrol Pump, Piraman Naka, Ankleshwar. Email - Khalidrangrej99@gmail.com

Mob - 9377543085

Estimate
Date :- 05/06/2024

Emaii - Knaii

Summary for Estimate of proposed **Ground floor of** Darul Quran, Dandeli. Dist- Karwar, Karnataka. Manage By - Majlis - E- Sabilut Tauheed Cheritable Trust Note: - All Internal and External work included, e.i lock and key. (4876.00 Sq,Ft) Floor Height 14'.0"

Ref By :- Janab Khalil Bhai,...

SR. NO. DESCRIPTION	AMOUNT IN INR,
AS -1 AEC Block (Bricks)(11250 X RS. 55)	6,18,000 = 00
AS -2 CEMENT IN BAGS (1900 X 395)	7,50,500 = 00
AS -3 STEEL IN Kgs. 8 MM 3500 Kgs, (21000 Kgs X Rs,63 10 MM 8500 Kgs, 12 MM 7500 Kgs, 16 MM 1500 Kgs,	13,23,000 = 00
AS -4 Soil Filling in Plinth (L/S)	25,000 = 00
AS -5 FINE AGGREGATE (400 Ton, X Rs,600)	2,40,000 = 00
AS -6 COURSE AGGREGATE (300 Ton, X Rs, 800	2,40,000 = 00
AS -7 KOTA STONE FOR FLOORING (With Wastage and Skirting) (4300 Sq,Ft X Rs, 40)	1,72,000 = 00
AS -8 Tiles for Wuzu and Toilet Area (Wall and floor) (3000 Sq,Ft X Rs, 35)	1,05,000 = 00
AS -9 Granite for Doors & Windows (1000 Sq,Ft X Rs, 125)	1,25,000 = 00
AS -10 Doors & Windows (Allumi, Section)	1,65,000 = 00
AS -11 M.S Grill and Stair Railling	65,000 = 00
AS -12 Plumbing and Sanatory work	2,60,000 = 00
AS -13 ELECTRIFICATION (Material)	40,000 = 00
AS -14 COLOR WORK	75,000 = 00
AS -15 LABOUR FOR CONSTRUCTION WORK	16,57,500 = 00
AS -16 LABOUR FOR ELEC, TILE, COLOR, etc	5,40,000 = 00
AS -17 MISCELLANEOUS WORK	10,000 = 00
TOTAL	Rs, $\overline{64,11,000} = 00$

Rs. Sixtyfour Lakh Eleven Thousand Only.

Khalid Rangrej.

D.C, D.C.E, B,Arch Opp- Petrol Pump, Piraman Naka, Ankleshwar. Email - Khalidrangrej99@gmail.com Mob - 9377543085

Estimate
Date :- 05/06/2024

Summary for Estimate of proposed **First floor of** Darul Quran, Dandeli. Dist- Karwar, Karnataka. Manage By - Majlis - E- Sabilut Tauheed Cheritable Trust Note: - All Internal and External work included, e.i lock and key. (4876.00 Sq,Ft) Floor Height 12'.0"

SR. NO.	DESCRIPTION	AMOUNT IN INR,
AS -1 AEC I	Block (Brick)(8000 X RS. 55)	4,40,000 = 00
AS -2 CEMI	ENT IN BAGS (1400 X 395)	5,53,000 = 00
AS -3 STEE	L IN Kgs. 8 MM 1600 Kgs, (13500 Kgs X Rs,63 10 MM 5000 Kgs, 12 MM 5500 Kgs, 16 MM 1400 Kgs,	8,50,500 = 00
AS -4 FINE	AGGREGATE (250 Ton, X Rs,600)	1,50,000 = 00
AS -5 COUR	SE AGGREGATE (170 Ton, X Rs, 80	(00) $1,36,000 = 00$
AS -6 Kota S	stone Flooring (4000 Sq,Ft X Rs, 40)	1,60,000 = 00
AS -7 Tiles to	for Toilet 200 Sq,Ft X Rs, 40)	48,000 = 00
AS -8 Granite	e for Doors, Windows & Platform 00 Sq.Ft X Rs, 125)	1,12,500 = 00
	& Windows Allumi, Section	1,75,000 = 00
	Brill and Stair Railling	50,000 = 00
AS -11 Plumbing and Sanatory work		1,25,000 = 00
AS -12 ELECTRIFICATION (Material)		60,000 = 00
AS -13 COL	OR WORK	80,000 = 00
AS -14 LAB	OUR FOR CONSTRUCTION WORK	14,62,320 = 00
AS -15 LAB	OUR FOR ELEC, TILE, COLOR, etc	4,80,000 = 00
AS -16 MISO	CELLANEOUS WORK	5,000 = 00
	TOTAL	Rs, $48,87,320 = 00$
Rs. Fortyeight	Lakh Eightyseven Thousand-	

- Three Hundred and Twenty Only.

Khalid Rangrej.

D.C, D.C.E, B,Arch Opp- Petrol Pump, Piraman Naka, Ankleshwar. Email - Khalidrangrej99@gmail.com Mob - 9377543085

Summary

Ground floor : 64,11,000 = 00 Rs,

First Floor : 48,87,320 = 00 Rs,

Grand Total : 1,12,98,320 = 00 Rs,

Say 1,13,00,000 = 00 Rs, (Total 9752 Sq,Ft \pm)

Rs. One Crore Thirteen Lakh Only.

Total estimated cost for proposed **Darul Quran, Dandeli,** Dist - Karwar. KARNATAKA, INDIA.

The above details are as per my architectural knowledge & Belief.

THANK YOU

AR. KHALID RANGRE.

khalidrangrej99@gmail.com

9377543085